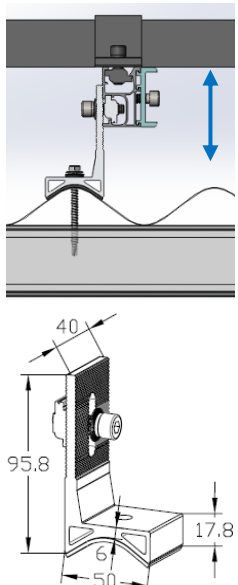


SolarRoof, Tin Interface with Curved Base for Corrugated Roof

Component

	
Tin Interface with Curved Base for Corrugated Roof (Z Module+ Bolt + Universal Screw) Part No.: ER-I-25, ER-I-25/BA	

Technical Specification

Application	Corrugated Tin Roof	 Clearance 89~104mm
Purlin requirement	Metal or Timber purlin	
Screw specification	Buildex 14-11 x 70 (14 gauge, 6.3 mm, 11 TPI, 70 mm long) Hex Head Zips Screw	
EPDM	Pre-fitted (2mm thickness)	
Dimensions	L40mm*W50mm*H95.8mm	
Packaging	40 units per pack; 4 packs (160 units) per carton	
Material	Main Structure: AL6005-T5 Bolts/washers/nuts: SUS 304	
Weight	0.139 kg	
Color	Silver (anodized, no less than 10 µm) Black (full anodized)	
Standard	AS NZS1170.2-2011	