



Module Inter and End Clamp, Security Series


Assembly

	
Fixing the framed panel with End Clamp	Fixing the framed panel with Inter Clamp

Component

	
End Clamp, Security Series Part No.: ER-EC-ST35/S (bar code: 13-11011-011) Part No.: ER-EC-ST40/S (bar code: 13-11011-012)	Inter Clamp, Security Series Part No.: ER-IC-ST35/S (bar code: 13-11023-001) Part No.: ER-IC-ST40/S (bar code: 13-11023-005)

Technical Specification

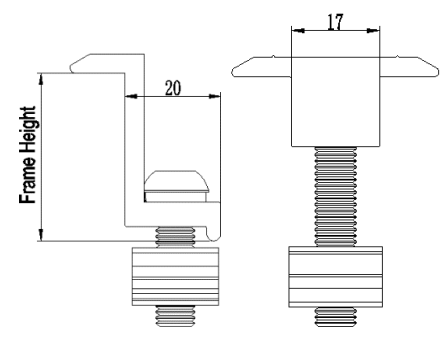Application	ER-EC-ST35/S is for framed PV Module of 35-37 mm high (with ECO-Rail and T-Rail) ER-EC-ST40/S is for framed PV Module of 40-42 mm high (with ECO-Rail and T-Rail) ER-IC-ST35/S is for framed PV Module of 29-36 mm high (with ECO-Rail)/31-36 mm (with T-Rail) ER-IC-ST40/S is for framed PV Module of 34-41 mm high (with ECO-Rail)/36-41 mm (with T-Rail)	 A driving bit provided in each pack of inter clamp 
Recommended torque	16-20 N·m	
Packaging	ER-EC-ST/S: 100 units per pack, 4 packs (400 units) per carton ER-IC-ST/S: 100 units per pack, 4 packs (400 units) per carton Including a special driving bit per pack	
Packaging Dimension	L395*W260*H330mm (carton dimension)	
Weight	ER-EC-ST35/S: 0.059 Kg; 25.07 Kg (carton weight) ER-EC-ST40/S: 0.062 Kg; 26.27 Kg (carton weight) ER-IC-ST35/S: 0.075Kg; 31.47 Kg (carton weight) ER-IC-ST40/S: 0.087 Kg; 36.27 Kg (carton weight)	
Material	Main Structure: AL6005-T5 Fasteners: SUS 304	
Color	Silver (half-anodized no less than 10 μm)	
Standard	AS NZS1170.2-2011	