





SADL Bracket A2 for Trimdeck Roof


Assembly

			
Rail running parallel to roof rib	Rail running perpendicular to roof rib	Rail running parallel to roof rib	Rail running perpendicular to roof rib
With Tin Interface		With Cross Connector Clamp	

Component


SADL Bracket A2 Part No.: ER-I-65 (bar code: 10-002-00663)

Technical Specification

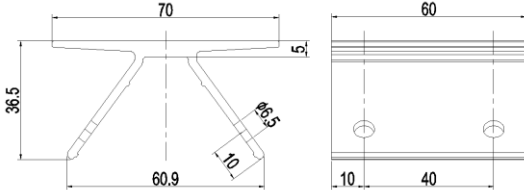Application	Lysaght Trimdek Trapezoidal Roof sheet penetration	
Fasteners Specification	4 x Buildex M6-11 x 25 (12 gauge, 6.0 mm, 11 TPI, 25 mm long) Hex Head Tekes with 16 mm Bonded Washer, C4 rated; 1 x Hexagon socket head bolt M8*20	
EPDM	Pre-fitted (2 x 2mm thickness)	
Dimensions	L70mm*W60 mm*H36.5mm	
Packaging	40 units per pack, 4 packs (160 units) per carton	
Packaging Dimension	L397*W267*H345mm (carton dimension)	
Weight	0.115 Kg; 20 Kg (carton weight)	
Material	Main Structure: AL6005-T5 Self-drilling Screws: Carbon Steel SAE 1022 Bolt/washers: SUS 304 Rubber Pads: EPDM	
Color	Silver (Anodized, no less than 10 µm, excluding machined surfaces)	
Standard	AS NZS1170.2	